

790 LT

COLORIS®

790 LT is a slower drying stamping ink developed especially for plastics.

Properties:

It is colour fast, weather-proof and has good resistance to alcohol. For this reason, 790 LT is particularly suitable for marking electronic circuit boards which are frequently washed with isopropanol for final cleaning.


Application:

We also recommend 790 LT for marking lacquers and waxed cardboard. The translucent types are preferable for light backgrounds; the pigmented versions for dark backgrounds. Suitability tests should be carried out because too many different qualities are available on the market to allow a reliable recommendation.

Drying time:

~2min (PE foil) 790

~4min (PE foil) 790 LT

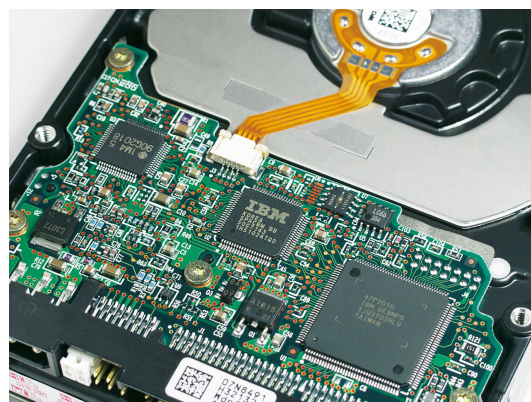

Viscosity:

Low viscosity, ~20-30sec
(Ford 4mm cup)

Stamp material:

Rubber

Stamp pad material:


We recommend felt plate pads. On automatic stamping machines, systems with ink reservoir are preferable.

Thinner/cleaner:

Thinner 455

Available standard sizes:

50ml/g · 250ml/g · 1000ml/g · 5000ml/g



Transparent Opaque